




# Tag Installation Guide

## Installing your tag in a car

You should install your DirectRoute tag inside your vehicle, just behind the rear-view mirror.

### 1. Insert the Tag

Attach the holder to the tag by sliding it into the slot of the tag, as pictured.



### 2. First Check the Position

Before you remove the adhesive protection, place the holder including the tag horizontally behind the rear view mirror, making sure that it will fit and not obstruct the driver's view.




### 3. Clean your windscreen

With the cleaning tissue provided where the tag will be placed. Make sure that the windscreen is dry and has a temperature of at least 15°C. If necessary, dry with a cloth.



### 4. Remove Adhesive Protection

The tag holder is now ready to attach to the windscreen.



### 5. Attach the holder

Fix the tag holder (with tag attached) on the windscreen, making sure that the tag is straight. Hold firmly for at least 10 seconds. If your windscreen is UV-coated, install the holder on the black dots.




## Installing your tag in a bus, lorry or truck

You should install your DirectRoute tag inside your vehicle, at the bottom centre of the windscreen.


### 1. Insert the Tag

Attach the holder to the tag by sliding it into the slot of the tag, as pictured.




### 2. First Check the Position

Before you remove the adhesive protection, place the holder including the tag vertically at the bottom of the windscreen, making sure that it will fit and not obstruct the drivers's view.




### 3. Clean your windscreen

With the cleaning tissue provided, clean the windscreen where the tag will be placed. Make sure that the windscreen is dry and has a temperature of at least 15°C. If necessary, dry with a cloth.



### 4. Remove Adhesive Protection

The tag holder is now ready to attach to the windscreen



### 5. Attach the holder


Fix the tag holder (with tag attached) on the windscreen, making sure that the tag is straight. Hold firmly for at least 10 seconds



**Note:** Some windscreens have a metallic layer to reflect heat from the sun, In this case the tag must be placed within the designated areas of the windscreen without this coating. These are normally marked with a different color or pattern.

# Athermic Windscreen Tag Placement Guide

For accurate tag readings on toll roads nationwide, it is important to position your tag in the correct location. Please read these instructions before affixing your tag. The tag must be placed behind your rear view mirror in the centre of the shaded/dotted area.

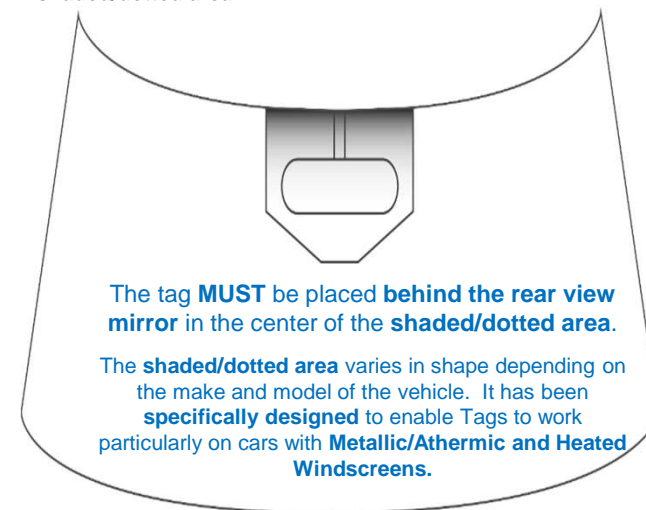

This is critical for vehicles with heated or athermic windscreens.

Some older model cars may not have this shaded area. If this is the case, simply place behind the rear view mirror.

## Fitting instructions for modern people carriers and vans

e.g: Renault Espace, Citroen Grand Picasso, Ford Focus SMax, Ford Galaxy. NB: Position the tag at the bottom edge of the shaded area.

